

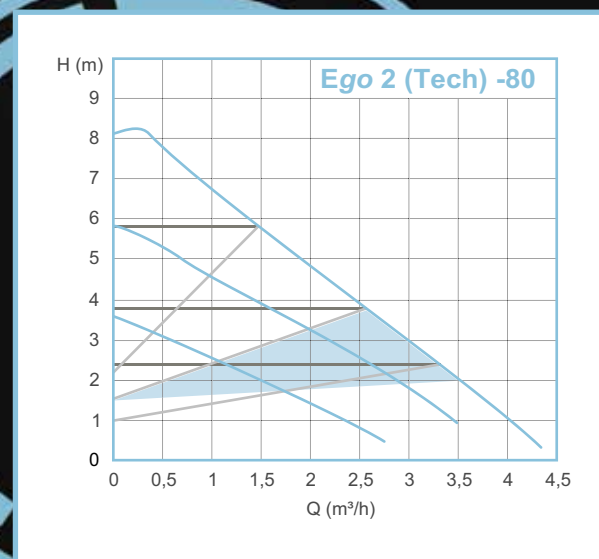


# Technical features

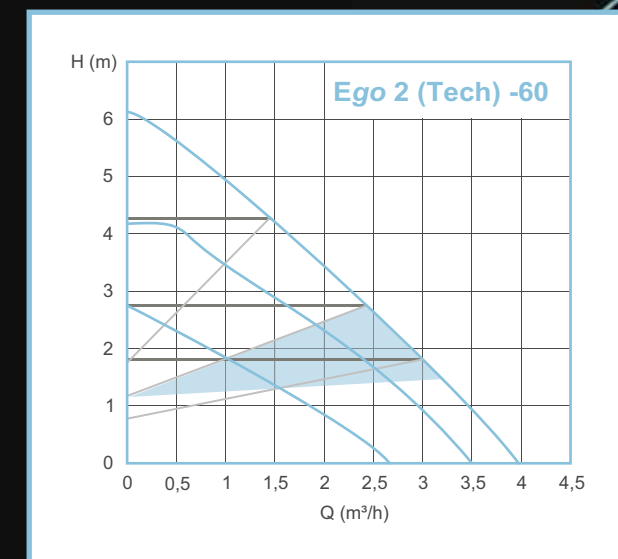

## Technical data

Max. pressure:	10 bar
Liquid temperature:	-10 ÷ +110°C
Ambient temperature:	0 ÷ +40°C
Max. glycol quantity:	30%
Minimum suction pressure:	0,05 bar at 50°C 0,4 bar at 80°C 1,1 bar at 110°C
Insulation class:	F
Protection degree:	IP44
Voltage:	Single phase 1~230V

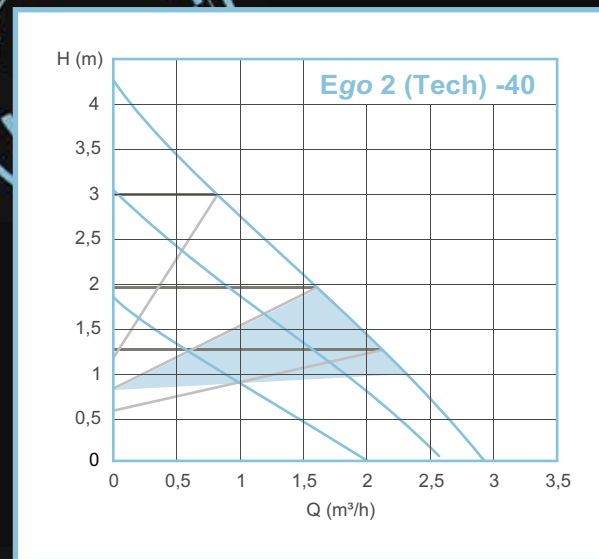

— Auto mode   
 - - - Constant pressure   
 · · · Fixed speed   
 - · - · Proportional pressure



**EBARA Pumps Europe S.p.A.**  
 Via Torri di Confine 2/1 int. C  
 36053 Gambellara (Vicenza), Italy  
 Phone +39 0444 706811  
 Fax +39 0444 405811  
 ebara\_pumps@ebaraeurope.com  
 www.ebaraeurope.com

**EBARA Corporation**  
 11-1, Haneda Asahi-cho, Ota-ku,  
 Tokyo 144-8510  
 Japan  
 Phone +81 3 6275 7598  
 Fax +81 3 5736 3193  
 www.ebara.com



479705648 02/20

Looking ahead,  
going beyond expectations  
*Ahead Beyond*



## New Ego 2 and Ego 2 Tech circulators

Product Catalogue



# A further step forward

The Ego range evolves and becomes even more efficient thanks to the new circulators Ego 2 and Ego 2 Tech.  
The new Ego 2 and Ego 2 Tech offer:

- The best efficiency index in their category
- New motor technology as already used for Ego Easy and Ego Slim
- Compactness and lightness thanks to new design
- New display for better management and visualisation of operating parameters
- New operating modes
- Simple installation
- 5 years warranty



- Constant pressure
- Proportional pressure
- Fixed speed
- Auto mode
- Night mode

## Ego 2



- Operating mode:**
- Proportional pressure
  - Constant pressure
  - Fixed speed



## Ego 2 Tech



- Operating mode:**
- Proportional pressure
  - Constant pressure
  - Fixed speed
  - Auto mode
  - Night mode

- 4 viewable parameters:**
- Power (W)
  - Head (m)
  - Flow (m<sup>3</sup>/h)
  - Error occurred

